


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

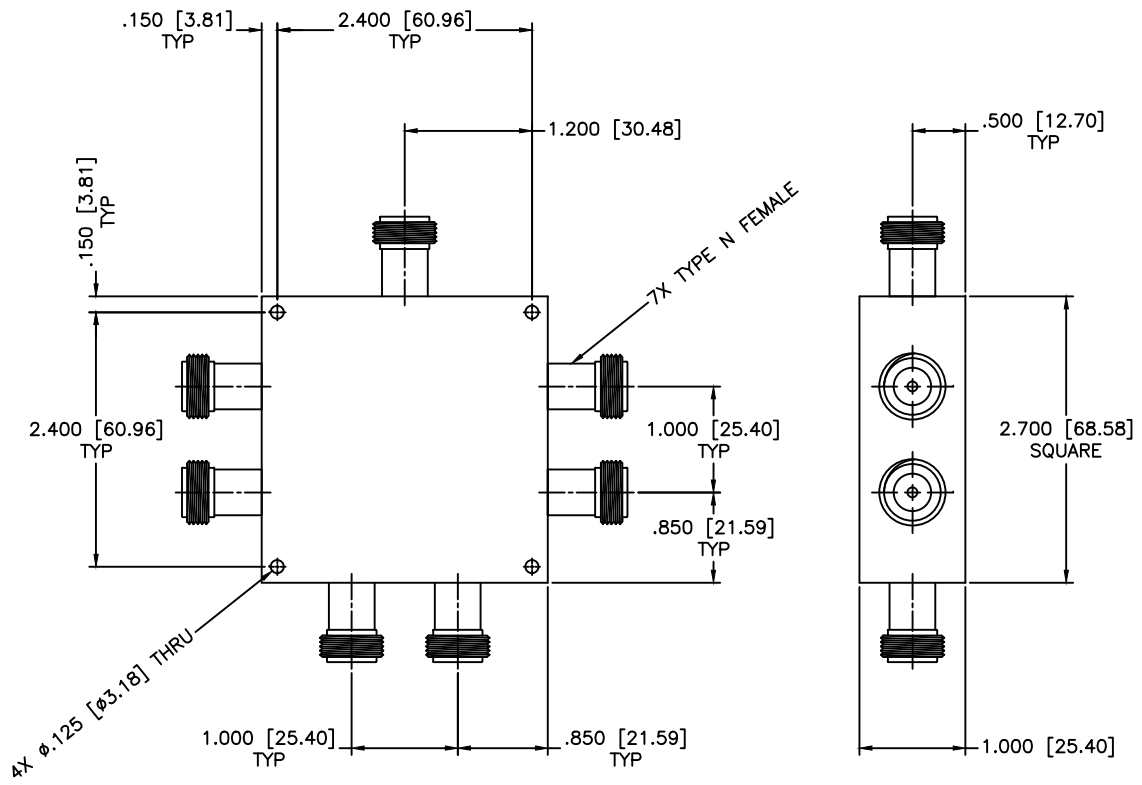

SPECIFICATIONS

Frequency Range: 500-1000 MHz
 Isolation: 18dB Min.
 Insertion Loss: 2.8dB Max.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±10 Deg. Max.
 VSWR: 1.60:1 Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A			
			SHEET:	N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°	DRAWING TITLE: 6-WAY POWER DIVIDER				
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PL6-5/NF				
DRAWN: Paiboon Luekhamhan	DATE: 10-30-1997	THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5			
APPROVED: T. Nguyen	DATE: 10-30-1997		SIZE:	N/A	REV:	N/A	DWG NO.:
			DO NOT SCALE THE DRAWING				