


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

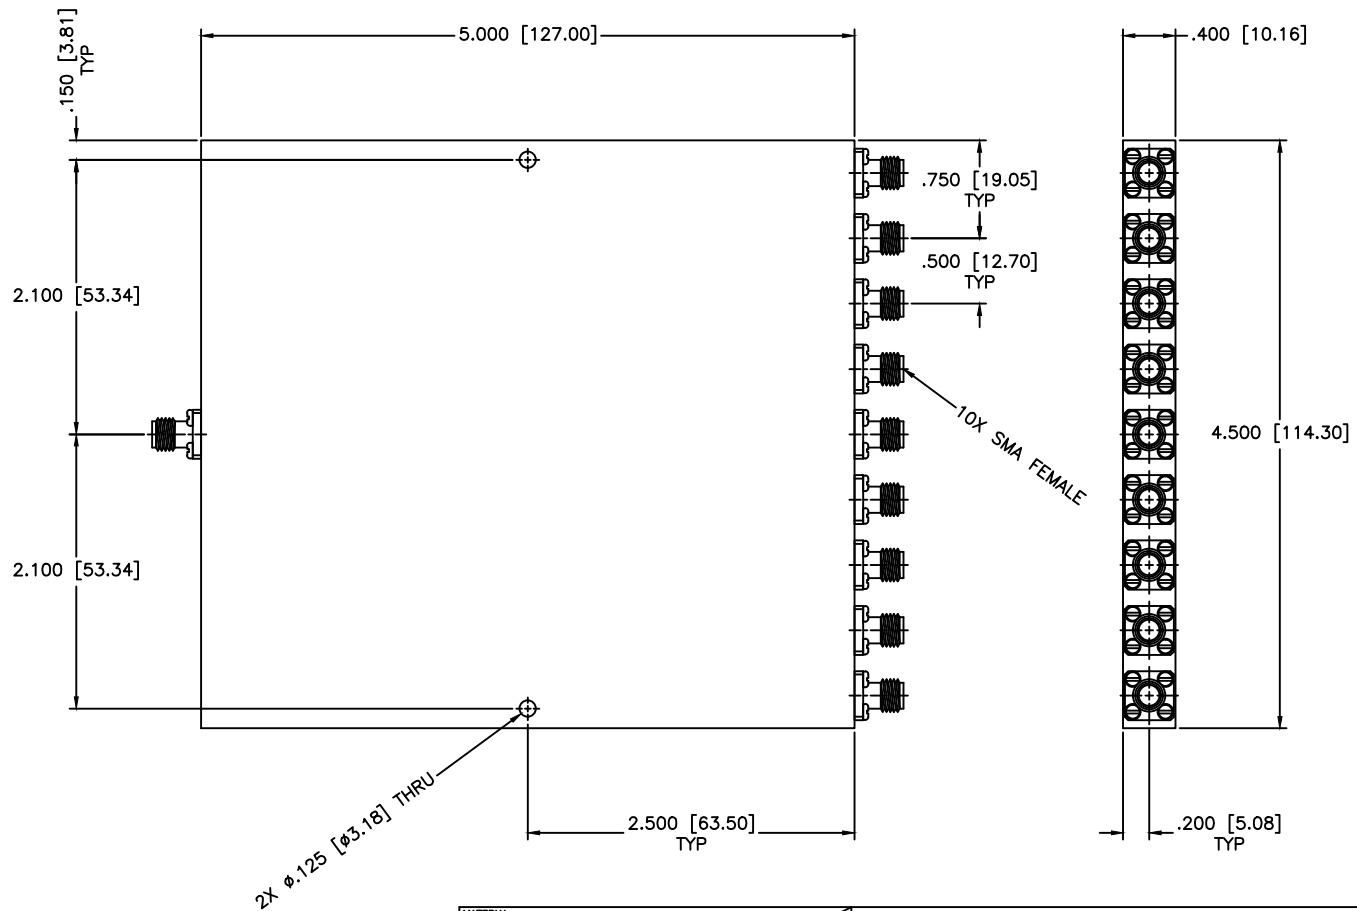

SPECIFICATION

Frequency Range: 1700–1890 MHz
 Insertion Loss: 1.2dB Max.
 Isolation: 17dB Min.
 VSWR IN/OUT: 1.60:1/1.45:1 Max.
 Amplitude Balance: ±1.5dB
 Input Power: 10 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 9-WAY POWER DIVIDER	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS9-5	
DRAWN:	DATE:	THIRD ANGLE PROJECTION	CAGE CODE:	SIZE:
Paiboon Luekhamhan	12-30-2004		OD2L5	A
APPROVED:	DATE:		REV:	DWG. NO.
T. Nguyen	12-30-2004		N/A	82074
			DO NOT SCALE THE DRAWING	